


**G . Fast Transformer**

- Designed to meet UL 60950-1 and IEC 60950-1 requirements for supplementary insulation
- RoHS Compliant
- Operating Temperature -40°C to +85°C

**Dimensions**

(Units:  $\frac{\text{Inches}}{\text{mm}}$  , Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$  )

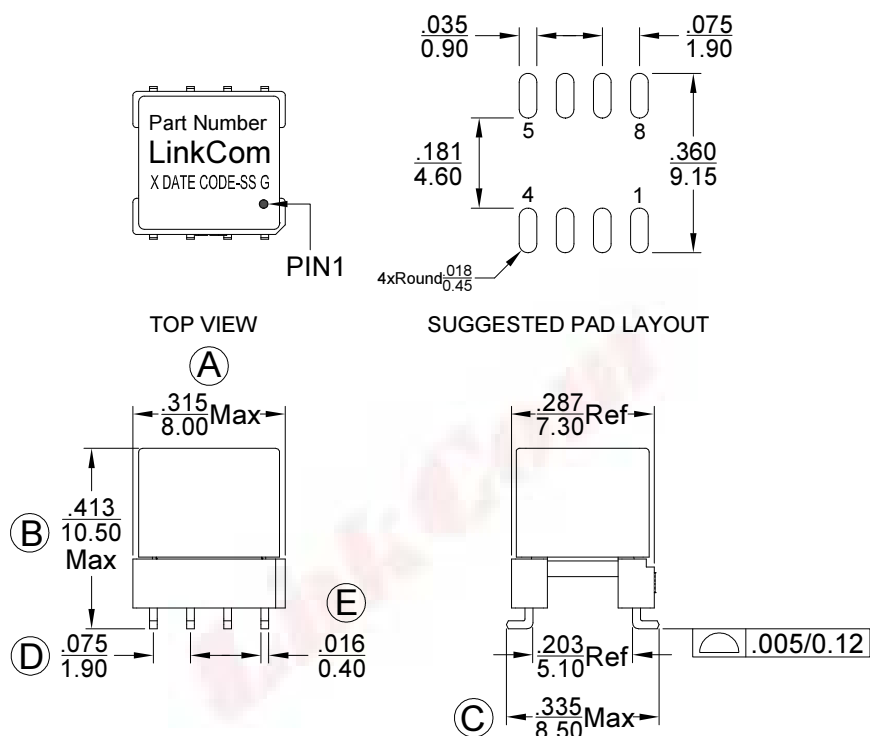

There shall be no breakdown between winding 1,2,3,4 & 5,6,7,8 when tested according to ITU-T K.21:2017 enhanced level 6KV,per 2.1.1.b using the test procedures of K.44:2017

**Schematic**

